

# General Specifications

## Model YTA110 Temperature Transmitter

YTA SERIES

GS 01C50B01-00E

[Style: S2]

The YTA110 is the high performance temperature transmitter that accepts Thermocouple, RTD, ohms or DC millivolts inputs and converts it to a 4 to 20 mA DC signal for transmission. The YTA110 supports either BRAIN or HART® 275 communication protocol.



### ■ FEATURES

#### High performance, high reliability

Microprocessor-based sensing technology ensures long-term accuracy and high reliability.

#### Variety of sensor inputs

The type of sensor input is user-selectable from thermocouples (T/C), RTDs, ohms, or DC millivolts.

#### Digital communication

BRAIN or HART® communication protocol is available. The instrument configuration can be changed by the user with using the BT200 or HART®275 communicator.

#### Self-diagnostics function

Continuous self-diagnostics capability ensures long-term performance and lower cost of ownership.

#### LCD display with bargraph

The LCD display provides both a digital readout and percent bargraph simultaneously.

### ■ STANDARD SPECIFICATIONS

#### □ PERFORMANCE SPECIFICATIONS

##### Accuracy

(A/D accuracy/span + D/A accuracy) or  $\pm 0.1\%$  of calibrated span, whichever is greater. See Table 1. on page 3.

##### Cold Junction Compensation Accuracy

(For T/C only)  
 $\pm 0.5^\circ\text{C}$  ( $\pm 0.9^\circ\text{F}$ )

##### Ambient Temperature Effect (per $10^\circ\text{C}$ change)

$\pm 0.1\%$  or  $\pm$  (Temperature Coefficient /span), whichever is greater. See table 2. for Temperature Coefficient.

##### RFI Effect

Tested per EN 50082-2, field intensity up to 10 V/m.

##### Power Supply Effect

$\pm 0.005\%$  of calibration span per volt

##### Vibration Effect

10 to 60 Hz 0.21 mm peak displacement  
60 to 2000 Hz 3G

##### Position Effect

None

#### □ FUNCTIONAL SPECIFICATIONS

##### Input

Input type is selectable: Thermocouples, 2-, 3-, and 4-wire RTDs, ohms and DC millivolts. See Table 1. on page 3.

##### Span & Range Limits

See Table 1. on page 3.

##### Input signal source resistance (for T/C, mV)

1 k $\Omega$  or lower

##### Input lead wire resistance (for RTD, ohm)

10  $\Omega$  per wire or lower

##### Output

Two wire 4 to 20 mA DC. Signal range: 3.68 to 20.8 mA

BRAIN or HART® protocol is superimposed on the 4 to 20 mA signal.

Any single value from the followings can be selected as the analog output signal.

Sensor 1, Terminal Temperature.

Also, up to three of the above values can be displayed on LCD display or read via communication.

##### Isolation

Input/Output/GND isolated to 500 V AC

##### Sensor Burnout

High (21.6 mA DC) or Low (3.6 mA DC), userselectable.

##### Output in Transmitter Failure

High (21.6 mA DC or more) or Low (3.2 mA DC or less).

##### Update Time

Approximately 0.5 seconds

##### Turn-on Time

Approximately 5 seconds

**Damping Time Constant**

Selectable from 0 to 99 seconds

**Ambient Temperature Limits**

Option code may affect limits.  
 -40 to 85 °C (-40 to 185 °F)  
 -30 to 80 °C (-22 to 176 °F) with Integral Indicator

**Ambient Humidity Limits**

5 to 100 % RH at 40 °C (104 °F)

**EMC Conformity Standards** CE , N200

EN61326, AS/NZS 2064

**Self-calibration**

The analog-to-digital measurement circuitry automatically self-calibrates for temperature update by comparing the dynamic measurement to extremely stable and accurate internal reference elements.

**Self-diagnostics**

Loss of input error, ambient temperature error, EEPROM error, and CPU error. Up to four error history can be stored in the memory.

**Manual Output Function**

The output value can be set manually.

**Supply & Load Requirements**

**Supply Voltage**

10.5 to 42 V DC for general use and flameproof type  
 10.5 to 32 CV DC for lightning protector (Optional code /A)  
 10.5 to 30 V DC for intrinsically safe, Type n, nonincendive, or non-sparking type  
 Minimum voltage limited at 16.4 V DC for digital communications, BRAIN and HART® protocols

**Load**

0 to 1335 Ω for operation  
 250 to 600 Ω for digital communication

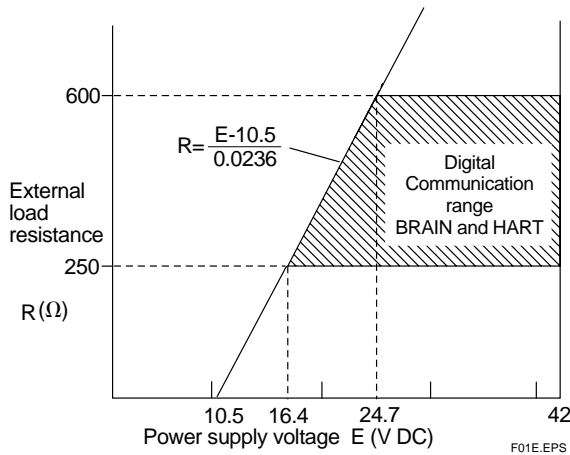


Figure 1. Relationship Between Power Supply Voltage and External Load Resistance.

**Communication Requirements**

**BRAIN**

**Communication Distance**

Up to 2 km (1.25 miles) when using CEV polyethylene-insulated PVC-sheathed cables. Communication distance varies depending on type of cable used.

**Load Capacitance**

0.22 μF or less

**Load Inductance**

3.3 mH or less

**Input Impedance of communicating device**

10 kΩ or more at 2.4 kHz.

**HART®**

**Communication Distance**

Up to 1.5 km (1 mile) when using multiple twisted pair cables. Communication distance varies depending on type of cable used.

Use the following formula to determine cable length for specific applications:

$$L = \frac{65 \times 10^6}{(R \times C)} - \frac{(C_f + 10,000)}{C}$$

Where:

- L = length in meters or feet
- R = resistance in Ω (including barrier resistance)
- C = cable capacitance in pF/m or pF/ft
- C<sub>f</sub> = maximum shunt capacitance of receiving devices in pF

**PHYSICAL SPECIFICATIONS**

**Enclosure**

**Material**

Low copper cast-aluminum alloy

**Coating**

Polyurethan resin baked finish  
 Color: Deep-sea moss green (Munsell 0.6GY3.1/2.0)

**Degrees of Protection**

IP67, NEMA4X, JIS C0920 immersion proof

**Data and tag plate**

SUS304 Stainless steel

**Mounting**

Optional mounting brackets can be used either for two-inch pipe or flat panel mounting.

**Terminal Screws**

M4 screws

**Integral Indicator**

Optional LCD digital indicator includes 5-digit numerical display with °C, K, °F, R, % and mV, 0 to 100 % bargraph and dot-matrix display.

**Weight**

1.2 kg(2.6 lb) without Integral indicator and Mounting bracket. Integral indicator weights 0.2 kg(0.4 lb).

**Electrical Connections**

Refer to 'MODEL AND SUFFIX CODES' on page 4.

**Table 1. Sensor type, measurement range, and accuracy.**

Sensor Type	Reference Standard	Measurement Range		Minimum Span (Recommended)	Accuracy				D/A Accuracy	
					Input range		A/D Accuracy			
		°C	°F		°C	°F	°C	°F		
T/C	IEC584	B	100 to 1820	212 to 3308	25 °C (45 °F)	100 to 300	212 to 572	± 3.0	± 5.4	± 0.02% of span
						300 to 400	572 to 752	± 1.0	± 1.8	
						400 to 1820	752 to 3308	± 0.75	± 1.35	
		E	-200 to 1000	-328 to 1832		-200 to -50	-328 to -58	± 0.35	± 0.63	
						-50 to 1000	-58 to 1832	± 0.16	± 0.29	
		J	-200 to 1200	-328 to 2192		-200 to -50	-328 to -58	± 0.40	± 0.72	
						-50 to 1200	-58 to 2192	± 0.20	± 0.36	
		K	-200 to 1372	-328 to 2502		-200 to -50	-328 to -58	± 0.50	± 0.90	
	-50 to 1372					-58 to 2502	± 0.25	± 0.45		
	N	-200 to 1300	-328 to 2372	-200 to -50		-328 to -58	± 0.80	± 1.44		
				-50 to 1300		-58 to 2372	± 0.35	± 0.63		
	R	-50 to 1768	-58 to 3214	-50 to 0		-58 to 32	± 1.0	± 1.8		
				0 to 100		32 to 212	± 0.80	± 1.44		
	S	-50 to 1768	-58 to 3214	100 to 600		212 to 1112	± 0.60	± 1.08		
600 to 1768				1112 to 3214	± 0.40	± 0.72				
T	-200 to 400	-328 to 752	-200 to -50	-328 to -58	± 0.25	± 0.45				
W3	ASTM E988	0 to 2300	32 to 4172	0 to 400	32 to 752	± 0.80	± 1.44			
				400 to 1400	752 to 2552	± 0.50	± 0.90			
W5	ASTM E988	0 to 2300	32 to 4172	1400 to 2000	2552 to 3632	± 0.60	± 1.08			
				2000 to 2300	3632 to 4172	± 0.90	± 1.62			
L	DIN43710	-200 to 900	-328 to 1652	0 to 400	32 to 752	± 0.70	± 1.26			
				400 to 1400	752 to 2552	± 0.50	± 0.90			
U	DIN43710	-200 to 600	-328 to 1112	1400 to 2000	2552 to 3632	± 0.70	± 1.26			
				2000 to 2300	3632 to 4172	± 0.90	± 1.62			
RTD	IEC751	Pt100	-200 to 850	-328 to 1562	-200 to -50	-328 to -58	± 0.30	± 0.54		
					-50 to 900	-58 to 1652	± 0.20	± 0.36		
					-200 to 850	-328 to 1562	± 0.20	± 0.36		
	JIS C1604	Pt500	-200 to 850	-328 to 1562	-200 to 500	-328 to 932	± 0.16	± 0.29		
					-200 to 500	-328 to 932	± 0.16	± 0.29		
	SAMA RC21-4	Cu	-70 to 150	-94 to 302	-70 to -40	-94 to -40	± 1.35	± 2.43		
					-40 to 150	-40 to 302	± 1.0	± 1.8		
—	Ni120	-70 to 320	-94 to 608	-70 to 320	-94 to 608	± 0.11	± 0.19			
mV	—	-10 to 100 [mV]		3 [mV]	—		± 12 [µV]			
ohm	—	0 to 2000 [Ω]		20 [Ω]	—		± 0.35 [Ω]			

T01E.EPS


Total Accuracy = (A/D Accuracy / Span + D/A Accuracy) or (± 0.1% of calibrated span), whichever is greater.

For T/C input, add Cold Junction Compensation Accuracy (± 0.5 °C) to the total accuracy.

Example; when selecting Pt100 with measurement range of 0 to 200 °C.

$$\frac{0.14^{\circ}\text{C}}{200^{\circ}\text{C}} \times 100\% \text{ of span} + 0.02\% \text{ of span} = 0.09\% \text{ of span}$$

Since the value is smaller than ± 0.1% of span, the total accuracy is ± 0.1%.



F02E.EPS

**Figure 2. Integral Indicator Display Example.**

**Table 2. Temperature Coefficient**

Sensor Type	Temperature Coefficient
Thermocouples E,J,K,N,T,L,U	0.08°C + 0.02% of abs.reading
Thermocouples R,S,W3,W5	0.25°C + 0.02% of abs.reading
T/C B	100°C ≦ Reading < 300°C
	300°C ≦ Reading
RTD	0.5°C + 0.02% of abs.reading
mV	0.002 mV + 0.02% of abs.reading
ohm	0.1 Ω + 0.02% of abs.reading

T02E.EPS

## MODEL AND SUFFIX CODES

Model	Suffix Codes	Descriptions
<b>YTA110</b>	.....	Temperature Transmitter
Output Signal	<b>-D</b> .....	4 to 20mA DC with digital communication (BRAIN protocol)
	<b>-E</b> .....	4 to 20mA DC with digital communication (HART protocol, refer to GS 1C50T1-E)
—	<b>A</b> .....	Always A
Electrical Connection	<b>0</b> .....	G1/2 female
	<b>2</b> .....	1/2 NPT female
	<b>3</b> .....	Pg 13.5 female
	<b>4</b> .....	M20 female
Integral Indicator	<b>D</b> .....	with digital indicator
	<b>N</b> .....	None
Mounting Bracket	<b>B</b> ....	SUS304 Stainless steel 2-inch horizontal pipe mounting *1
	<b>D</b> ....	SUS304 Stainless steel 2-inch vertical pipe mounting *1
	<b>N</b> ....	None
Optional Codes	/□ Optional Specifications	

\*1: For flat-panel mounting, please prepare bolts and nuts.

T03E.EPS

## OPTIONAL SPECIFICATIONS

Item	Descriptions	Code		
Lightning protector	Power supply voltage: 10.5 to 32 V DC Allowable current: Max. 6000A(1×40μs), repeating 1000A(1×40μs) 100 times	<b>A</b>		
Painting	Coating change	Epoxy resin coating	<b>X1</b>	
	Color change	Amplifier cover only	Munsell renotation code: N1.5 Black	<b>P1</b>
			Munsell renotation code: 7.5BG4/1.5, Jade green	<b>P2</b>
		Metallic silver	<b>P7</b>	
Calibration Unit	Degree F/Degree R unit	<b>D2</b>		
Output signal low-side in Transmitter failure	Output signal low-side: -5 %, 3.2 mA DC or less. Sensor burnout is also set to 'LOW': -2.5 %, 3.6 mA DC	<b>C1</b>		
Stainless steel housing *1	Housing Material: SCS14A stainless steel (equivalent to SUS316 cast stainless steel and ASTM CF-8M)	<b>E1</b>		

\*1: Available with optional code A, D2, C1, KU1, KU2, CU1, FF1, FU1, and SU1.

T04E.EPS

**OPTIONAL SPECIFICATIONS (For Explosion Protected Types)**

Item	Descriptions	Code	
CENELEC ATEX	<p>CENELEC ATEX (KEMA) Intrinsically safe, Flameproof approval and Type n combination*3                      [Intrinsically safe approval]                      II 1G EEx ia IIC T4, T5 Ambient Temperature : -40 to 70°C for T4, -40 to 50°C for T5                      Supply/Output circuit : Ui=30V, Ii=165mA, Pi=900mW, Ci=20nF, Li=660μH                      Input circuit : Uo=8.6V, Io=30mA, Po=70mW, Co=3μF, Lo=20mH                      Electrical Connection : 1/2 NPT female and M20 female</p> <p>[Flameproof approval]                      II 2G EEx d IIC T5, T6 Ambient Temperature : -40 to 80°C for T5, -40 to 75°C for T6                      Electrical Connection : 1/2 NPT female and M20 female</p> <p>[Type n approval]                      II 3G EEx nL IIC T4, T5 Ambient Temperature : -40 to 70°C for T4, -40 to 50°C for T5                      Supply/Output circuit : Ui=30V, Ci=20nF, Li=660μH                      Input circuit : Uo=8.6V, Io=30mA, Po=70mW, Co=3μF, Lo=20mH                      Electrical Connection : 1/2 NPT female and M20 female</p>	<b>KU2</b>	
Canadian Standards Association (CSA)	<p>CSA Intrinsically safe, non-incendive and Explosionproof approval combination                      [Intrinsically safe/non-incendive approval]                      Intrinsically safe for Class I, Division 1, Groups A, B, C and D; Class II, Division 1, Groups E, F and G; Class III, Division 1:                      Non-incendive for Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups E, F and G; Class III, Division 1:                      Enclosure Type 4X, Temperature Class : T4, Ambient Temperature : -40 to 60°C,                      Supply : Vmax=30V, Imax=165mA, Pmax=0.9W, Ci=18nF, Li=730μH                      Sensor input : Voc=9V, Isc=40mA, Po=0.09W, Ca=1μF, La=10mH                      Electrical Connection : 1/2 NPT female*2</p> <p>[Explosionproof approval]                      Explosionproof Class I, Div.1, Groups B, C and D, Class II, Groups E, F and G, Class III.                      For Class I, Div.2 Locations "FACTORY SEALED, CONDUIT SEAL NOT REQUIRED"                      Enclosure Type 4X Temperature Class : T4 Ambient Temperature : -40 to 60°C                      Electrical Connection : 1/2 NPT female*2</p>	<b>CU1</b>	
Factory Mutual (FM)	<p>FM Explosionproof approval                      Explosionproof Class I, Division 1, Groups A, B, C and D;                      Dust-ignitionproof for Class II/III, Division 1, Groups E, F and G.                      "FACTORY SEALED, CONDUIT SEAL NOT REQUIRED." Enclosure Rating: NEMA 4X                      Temperature Class : T6 Ambient Temperature : -40 to 60°C (-40 to 140°F)                      Electrical Connection : 1/2 NPT female*2</p>	<b>FF1</b>	
	<p>FM Intrinsically safe, non-intrinsically and Explosionproof approval combination                      [Intrinsically safe/non-incendive approval]                      Intrinsically safe for Class I, II, III Division 1 Groups A, B, C, D, E, F and G.                      Non-incendive for Class I, II, Division 2 Groups A, B, C, D, E, F and G Class III, Division 1.                      Enclosure Type : 4X Temperature Class : T4 Ambient Temperature : -40 to 60°C (-40 to 140°F)                      Supply : Vmax=30V, Imax=165mA, Pmax=0.9W, Ci=18nF, Li=730μH                      Sensor : Voc=9V, Isc=40mA, Po=90mW, Ca=1μF, La=10mH</p> <p>[Explosionproof approval]                      Class I, Division 1, Groups A, B, C and D;                      Dust-ignitionproof for Class II/III, Division 1, Groups E, F and G.                      "FACTORY SEALED, CONDUIT SEAL NOT REQUIRED." Enclosure Ratings : NEMA4X                      Temperature Class : T6 Ambient Temperature : -40 to 60°C (-40 to 140°F)                      Electrical Connection : 1/2NPT female*2</p>	<b>FU1</b>	
Standards Association of Australia (SAA)	<p>SAA Intrinsically safe, non-sparking and Flameproof approval combination                      Ex ia IIC T4 (Tamb=70°C) IP66/67, Ex n IIC T4(Tamb=70°C), IP66/67                      Input parameters : Ui=30V, Ii=165mA, Pi=0.9W                      Output parameters : Uo=8.6V, Io=30mA, Po=62mW, Co=1μF                      Ex d IIC T6 (Tamb=75°C) IP66/67                      Electrical connection : 1/2 NPT female, Pg13.5 female and M20 female*1.</p>	<b>SU1</b>	
Japanese Industrial Standards (JIS)	<p>JIS Flameproof approval                      Ex ds IIC T6 X *4                      Amb. Temp. : -20 to 60°C</p>	<b>JF3</b>	
Attached flameproof packing adapter*5	Electrical connection : G1/2 female Applicable cable : O.D. 8 to 12 mm	1 pc.	<b>G11</b>
		2 pc.	<b>G12</b>

\*1 : Applicable for Electrical connection code 2, 3 and 4.

\*2 : Applicable for Electrical connection code 2.

\*3 : Applicable for Electrical connection code 2 and 4.


\*4 : In case the ambient temperature exceeds 50°C, use heat resistant cables with maximum allowable temperature of 70°C or above.

\*5 : If cable wiring is to be used to a JIS flameproof type transmitter, do not fail to add the YOKOGAWA-assured flameproof packing adapter.


## DIMENSIONS

Unit: mm (Approx. inch)

### ● 2-inch horizontal pipe mounting

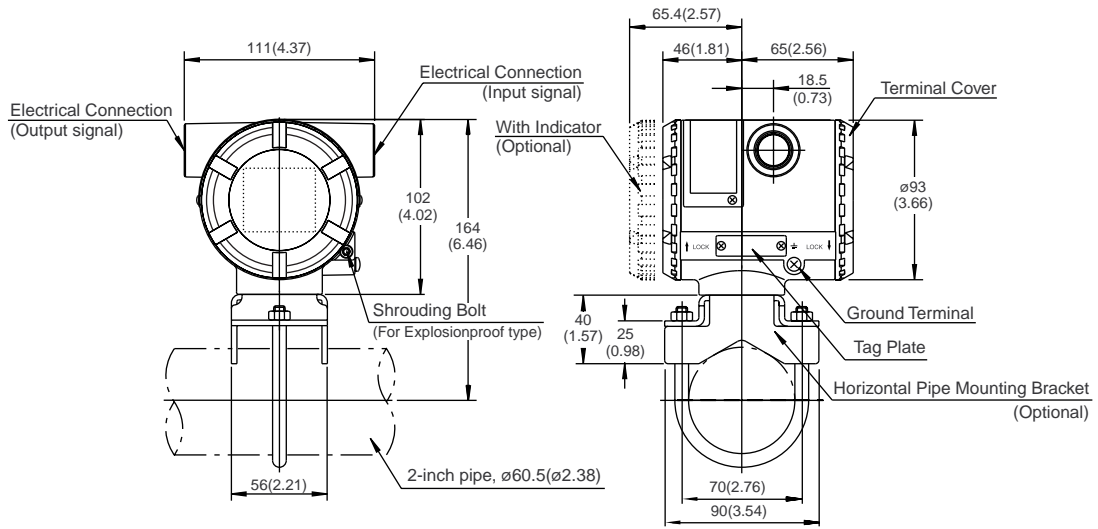


### ● 2-inch vertical pipe mounting

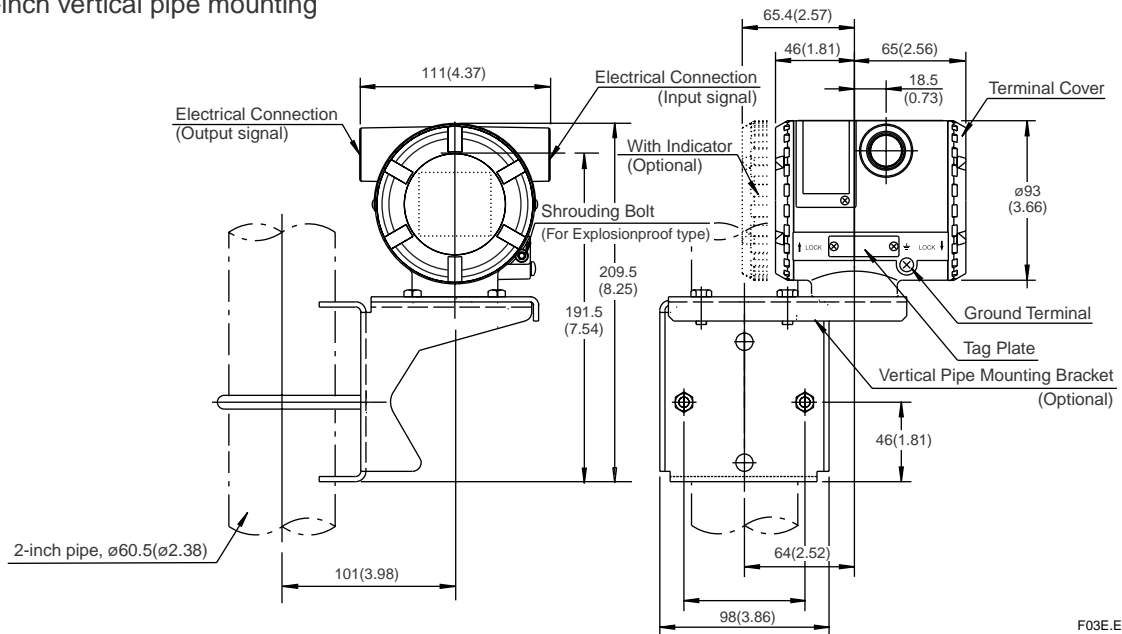

F03E.EPS

**Terminals**

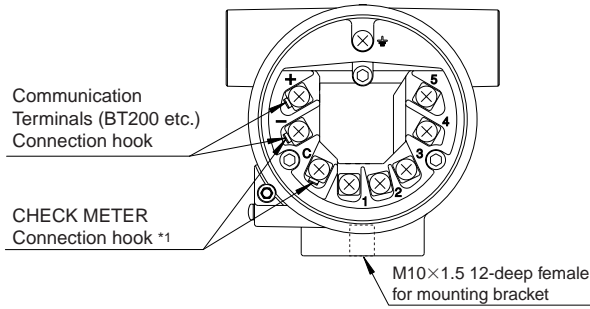


**Terminal Configuration**

+	Power Supply and output terminal
-	
-	External Indicator (ammeter) terminal *1
C	
⏏	Ground terminal

\*1: When using an external indicator or check meter, the internal resistance must be 10Ω or less. This hook is not available for Fieldbus communication type(output signal code F).

F04.EPS

**Input Wiring**

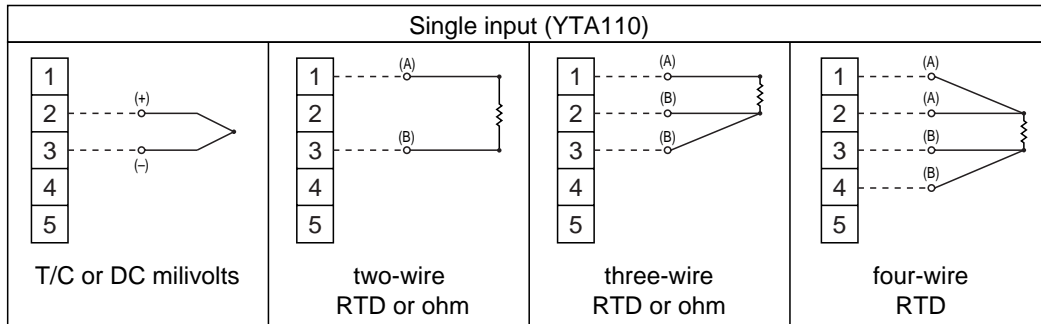

F05E.EPS

**< Ordering Information >**

Specify the following when ordering

Model, suffix codes, and optional codes

The instrument is shipped with the settings shown in Table A. Specify the following when necessary.

1. Sensor type.  
For RTD and resistance input, specify the number of wire as well.  
(Example; Pt200 3-wire system)
2. Calibration range and unit
  - 1) Calibration range can be specified within the measurement range shown in Table 1. on page 3.
  - 2) Specify one range from °C, K, °F or °R for temperature input. °F and °R are available when Optional code D2 is specified. It is not necessary to specify the unit of mV and ohm inputs, for these units automatically will be mV or Ω.
3. Tag Number

**Table A. Settings upon shipment.**

Input sensor type	Pt100 three-wire system, or as specified
Calibration range lower limit	"0" or as specified
Calibration range upper limit	"100" or as specified
Calibration unit	"°C" or as specified
Damping time constant	2 seconds
Sensor burnout *1	High (110%, 21.6 mA DC)
Output in Transmitter failure *1	High (110%, 21.6 mA DC or more)
Integral Indicator *2	PV
Output type	Sensor 1
Tag number	As specified in order

\*1: Except when Optional code C1 is specified.

\*2: When Integral indicator is specified.

T07E.EPS

**< Related Instruments >**

Power Distributor: Refer to GS 01B04T01-02E or GS 01B04T02-00E

BRAIN TERMINAL: Refer to GS 01C00A11-00E

**< Reference >**

HART; Trademark of The HART Communication Foundation. (USA)

**Material Cross Reference Table**

SUS304	AISI 304
--------	----------

T08E.EPS